

SIDE HINGED DOORS


Brickwork aperture sizes for frames fitted within the opening

Size code	Door size	Aperture
	width x height	width x height
6666	1981 x 1981 mm	2127 x 2054 mm
6670	1981 x 2134 mm	2127 x 2207 mm
7066	2134 x 1981 mm	2280 x 2054 mm
7070	2134 x 2134 mm	2280 x 2207 mm
7666	2286 x 1981 mm	2432 x 2054 mm
7670	2286 x 2134 mm	2432 x 2207 mm
8066	2438 x 1981 mm	2584 x 2054 mm
8070	2438 x 2134 mm	2584 x 2207 mm

- Door sizes given are for opening sizes within the frame.
- Aperture sizes include a minimum 3 mm gap between the frame and the brickwork on all three sides to allow for coursing and tolerances.


Fitting the frames to the brickwork

Frames should be fitted within the brickwork as per the drawing shown below:

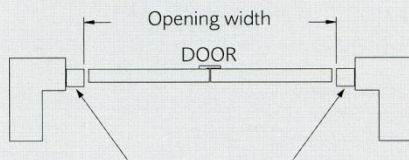


Steel Frame 65mm x 75mm or
70 mm x 70 mm [2³/₄" x 2³/₄"] timber frame
to be supplied and fixed by the customer

Opening arc of travel

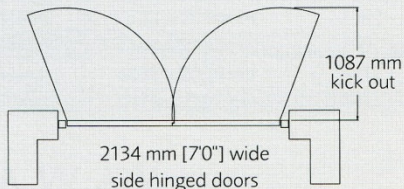

- Side hinged doors are supplied pre-framed as standard and come complete with a brass effect Euro profile night latch and deadlock, a pair of door stays, two monkey tail shoot bolts and four anti-drop anchored dog bolt hinges per door leaf.
- A luxury pack with three point locking for the active leaf and "monkey fur" draft sealing is available as an option.

Standard configuration

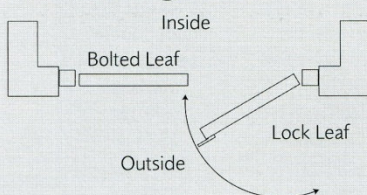


- Doors are supplied to open outwards with the lock on the right when viewed from the outside. Left hand opening is available as an option.



Unhanded Yale
night latch



Centre overlap



Three pairs of butt
hinges



Top and bottom bolts
(top bolt shown)