

## Aluroll Door Details - Classic

Available in 9 standard colours and 3 woodgrain laminate finishes.



The door curtain is constructed from 77mm foam filled aluminium slats approximately 15mm thick. All doors come fully automated as standard. All doors are made to measure at no additional cost.



View of the rear of the door. Note the neat full box housing which is a standard feature on all Aluroll doors.



Insulated roller door with box housing mounted externally.




Triple brush/rubber Draught Seal in the powder coated guides means a very quiet operation and a draught free garage. The heavy duty double Base Seal prevents draughts and debris blowing under the door.




The size and cost of the Insulated Roller Door is calculated by the overall curtain width which includes the 90mm guides each side and the overall height including the 300mm roller box above.

Classic door 77mm foam-filled slat

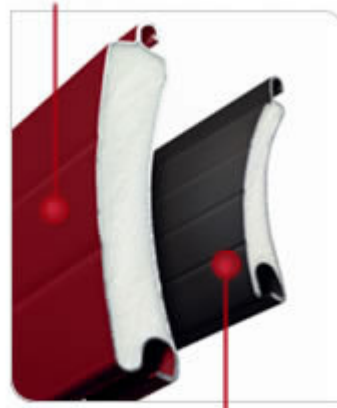

Compact door 55mm foam-filled slat

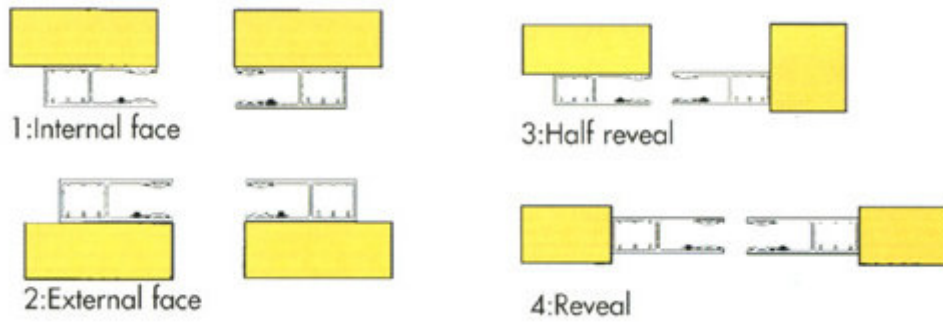

Doors are normally installed on the internal face. Fitting externally or between the reveals or a combination of fits is possible with this highly flexible product.

### Aluroll Door Details - Compact

Available in 6 standard colours and 3 woodgrain laminate finishes.



Classic door 77mm foam-filled slat



Compact door 55mm foam-filled slat


The Aluroll compact roller door gets its name from the smaller box housing used to house the curtain. On doors with an overall height of upto 2400mm, the box is 205mm square. On doors over 2400mm high, the box is 250mm square.

The compact insulated roller door is constructed from 55mm deep foam filled aluminium slats approximately 8mm thick. Guide width 68mm.


All other details are the same as the classic door.

## Aluroll Garage Door Automation Details

All Aluroll insulated roller doors come complete with full automation, control box and 2 mini-handsets. Manual versions of this door are not available. All prices shown for this door under "Products and Prices" include automation. Details shown below are to show the technical side of the product.

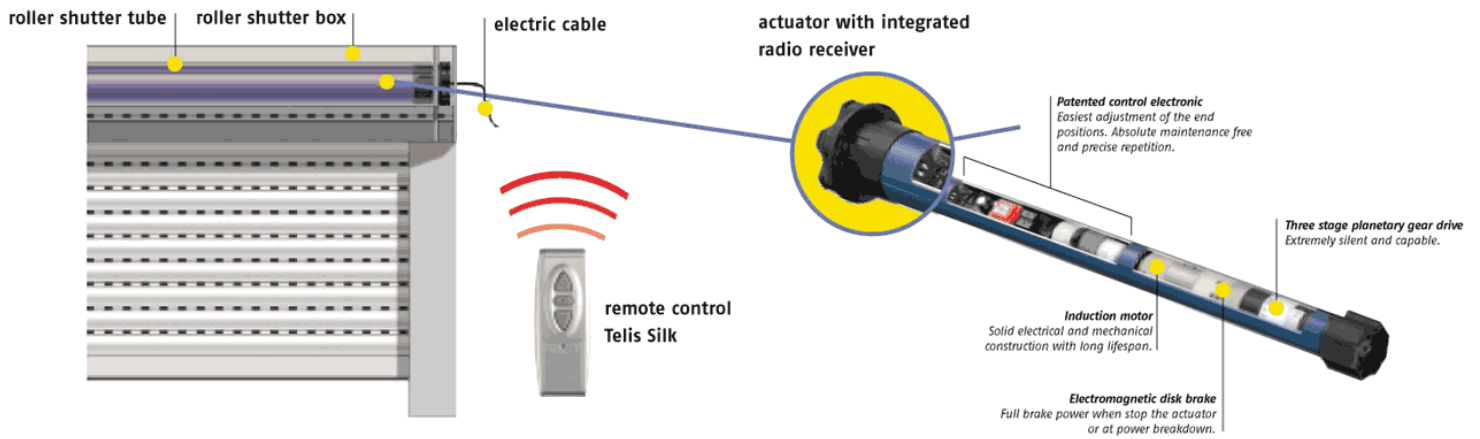

The Somfy motor has a 5 year guarantee and is recognised as the trade standard.

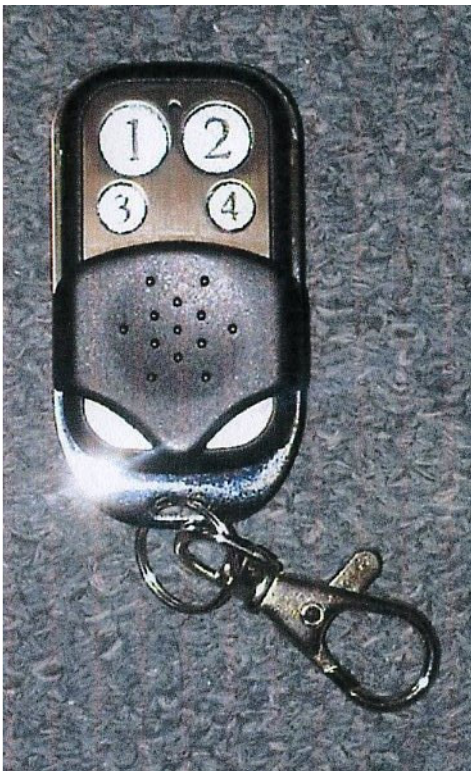

Aluroll Handset

The Ansa control system for the motor is, again, a recognised trade standard; reliable and easy to install. Rolling code technology gives high security. The control box has a courtesy light and an up/down button to control the garage door.

### **Police Approved “Secured-by-Design”**

Upgrade to Police Approved “Secured-by-Design” is available at extra cost. This consists of 150mm guides, fitted 30mm behind the brickwork and the box fitted 30mm behind the brickwork, so all are completely hidden from view. The guides are chemically fixed to the brickwork. The roller curtain is screwed to a heavy duty shaft.




### **External Manual Release**




### **Vision Slats**



## Classic Aluroll Sizes

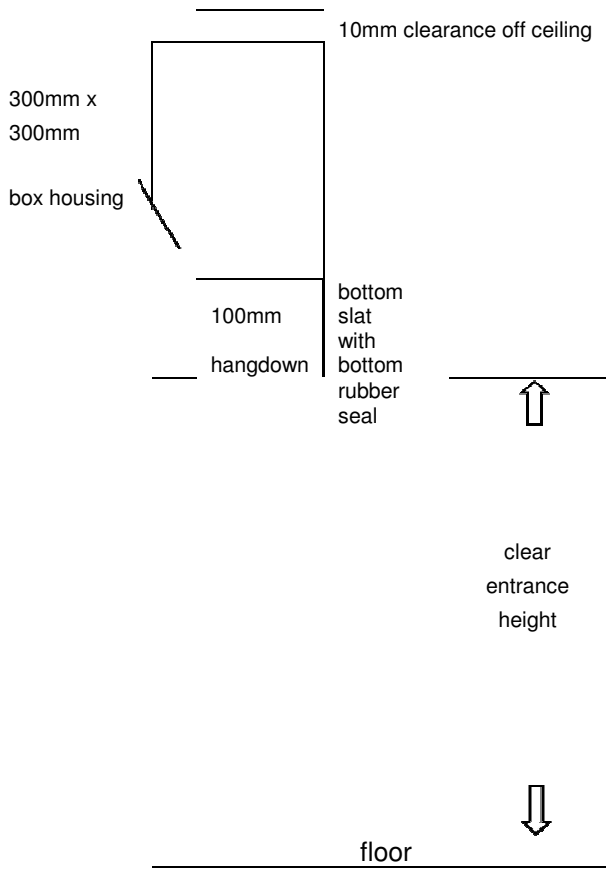

**Compact Aluroll Sizes**

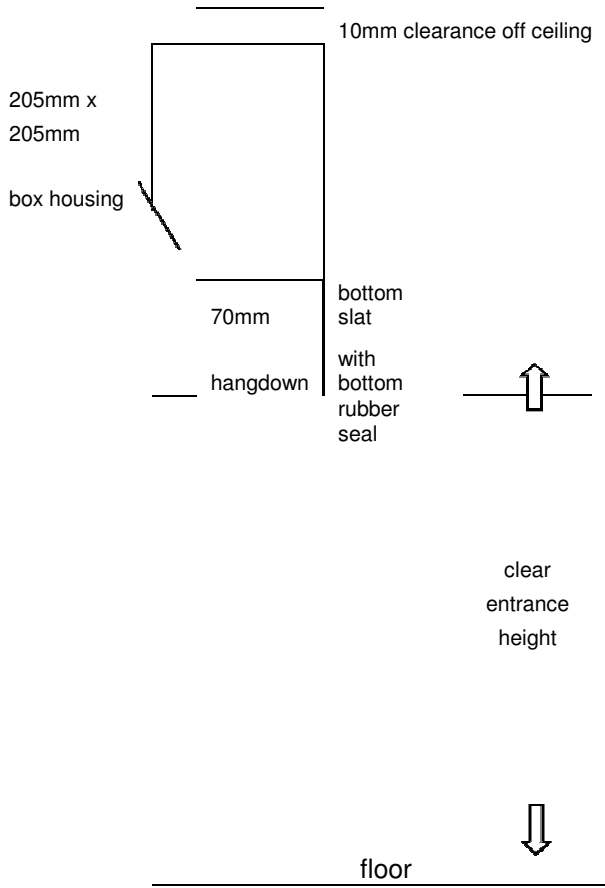

You will be able to calculate the clear entrance height from the above details